

## Service data sheet (10021512)

Söderberg u. Haak Maskin AB  
Industrievägen 2

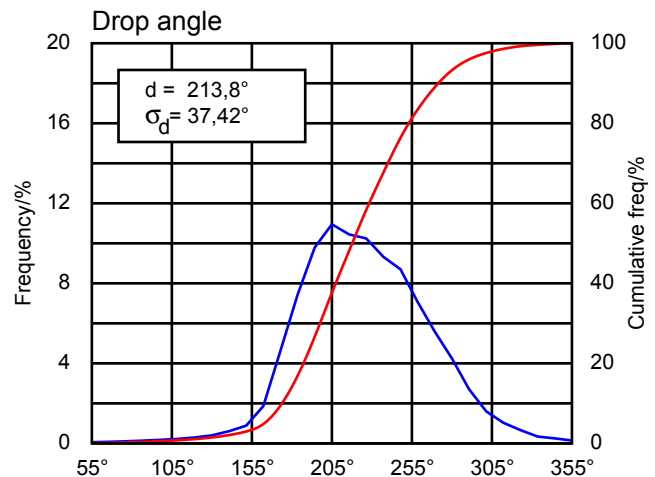
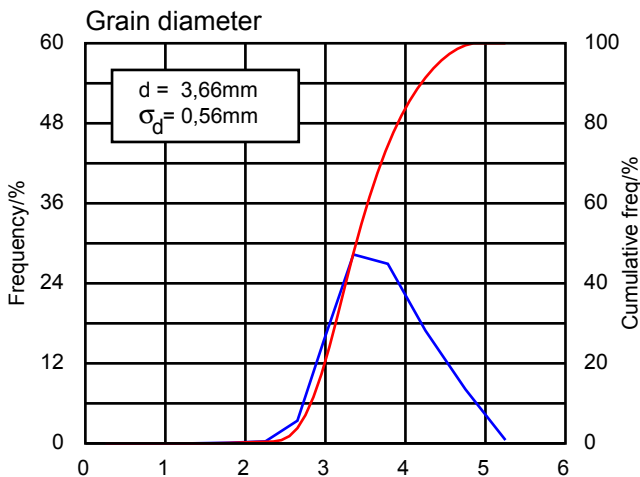
S - 24525 Staffanstorp

Date of test : 2015-04-30

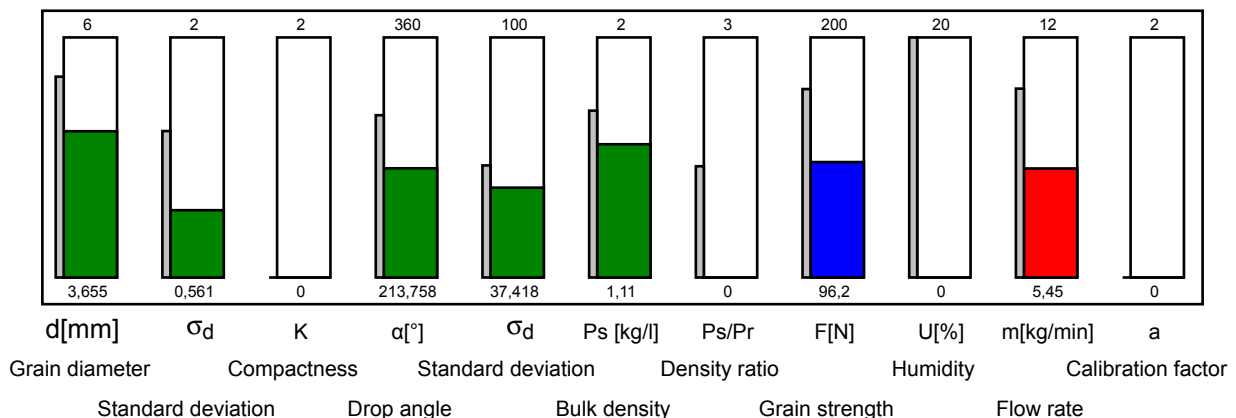
Material : **NS 27-4 gran. Anwil**

Material producer : ANWIL SA  
Machine type : ZATS  
Grain diameter : 3,66 mm  
Drop angle : 213,76 °  
Bulk density : 1,11 kg/l  
Flow rate : 5,45 kg/min

Material ID : 430504  
Material test ID : 83011580  
Operator : ubuecker



### Material data (NS fertilizers)




Comment : ZA-TS


Attention! We never spread a fertiliser with similar data. An additional cross-check on a mobile test kit is recommended.



**NS 27-4 gran. Anwil**  
(83011580)































**3,66mm**



**1,11kg/l**

Calibration factor **1,16**

**Attention! The stated settings are based on a 3kg sample test**

ZA-TS / ZG-TS														
														
<b>TSS</b>	<b>24.0</b>	21	800	C	1	800	1	24	720	1	34	600	22	2
	<b>27.0</b>	21	800	C	2	800	2	22	720	2	32	600	33	-5
	<b>28.0</b>	21	800	C	2	800	2	21	720	2	31	600	34	-5
	<b>30.0</b>	21	800	C	2	900	2	20	800	2	30	720	35	-5
	<b>32.0</b>	21	800	C	3	900	3	20	800	3	30	720	36	-4
	<b>33.0</b>	21	800	C	3	900	3	19	800	3	29	720	37	-3
	<b>36.0</b>	22	800	C	3	900	3	19	800	3	29	720	37	-1

Please note for your information: Even if the results of the tested fertiliser sample suggest a definitive recommendation as to the settings on the fertiliser spreader, it is not possible for AMAZONE to unequivocally guarantee the actual distribution in the field. For besides the physical properties of the fertiliser, the distribution depends on other additional factors, such as storage of the product between the testing and spreading, the setting and the level of maintenance on the spreader, or its actual operation by the tractor driver. We therefore recommend that the settings are verified in the field by the use of, for example, the mobile test kit.