

Service-Datablad (10042253)

Söderberg u. Haak Maskin AB
Industrievägen 2



S - 24525 Staffanstorp

Datum : 2020-03-24


Gödseltyp : **YaraMila® 27-3-3 gran. (GLO)**

Tillv. av gödsel. : YARA Norge AS / Glomfjord
Maskintyp : ZAV
Korndiameter : 3,48 mm
Kastvinkel : 218,50 °
Skakvikt : 1,03 kg/l
Flytegenskaper : 5,7 kg/min

Material ID : 431348
Materialtest ID : 83006602
Handläggare : kpaw

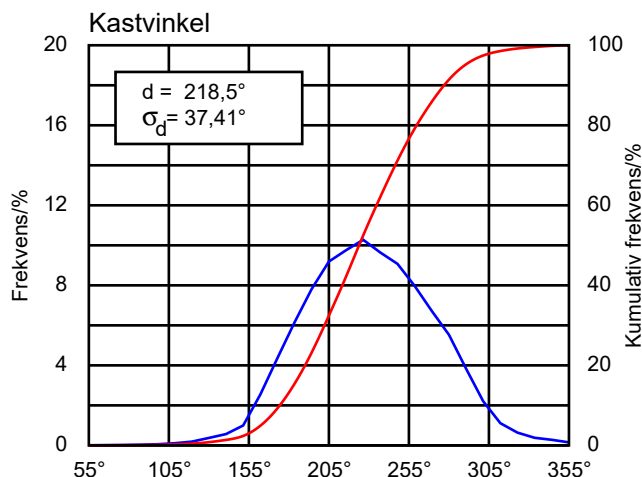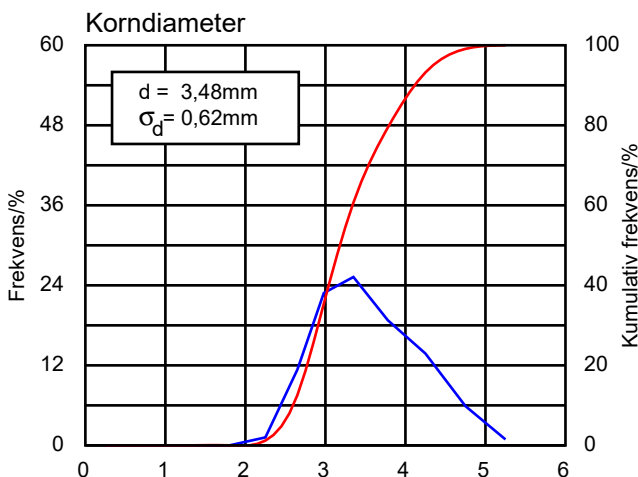

Materialdata (NPK-produkter)

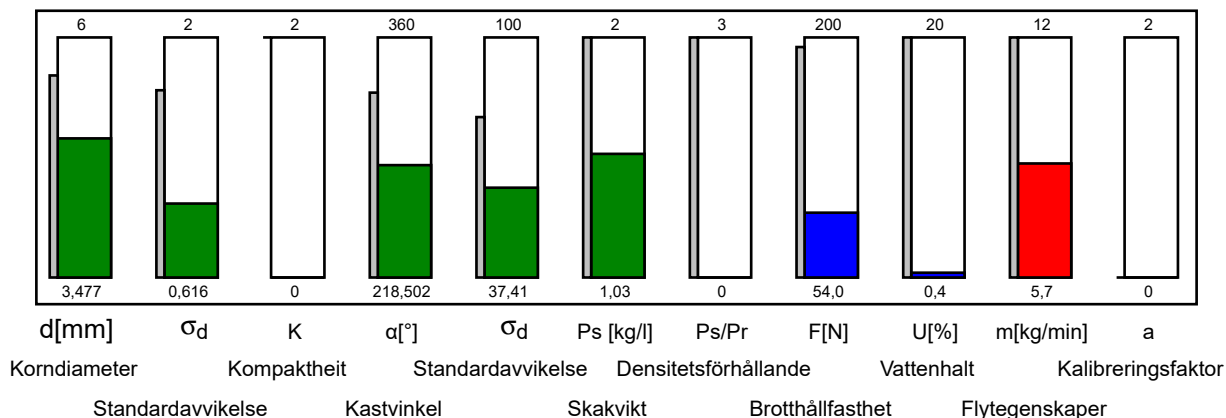

Anmärkning : ZA-V



YaraMila® 27-3-3 gran. (GLO)

(83006602)

















3,48mm



1,03kg/l

Kalibreringsfaktor **0,99**

Observera! De angivna inställningsvärdena baseras på 5 kg gödselprov.

ZA-V														
V-Set 1	10.0	13/45	720	B	70	100	25	3	100	60	8	-220	10	-1
	12.0	13/45	720	B	70	100	25	4	100	60	8	-220	18	-5
	15.0	14/45	720	C	70	100	25	4	100	60	9	-220	19	-4
	16.0	14/45	720	C	70	100	25	4	100	60	9	-220	19	-3
	18.0	14/45	720	D	70	100	25	5	100	60	9	-220	19	-2
	20.0	15/45	720	E	70	100	25	5	100	60	10	-220	19	0
	21.0	15/46	720	E	70	100	25	5	100	60	10	-220	19	0
V-Set 2	18.0	13/41	720	C	60	90	25	5	90	60	9	-220	21	-3
	20.0	13/42	720	D	60	90	25	5	90	60	10	-220	22	-2
	21.0	13/42	720	D	60	90	25	5	90	60	10	-220	22	-1
	24.0	15/42	720	D	60	90	25	5	90	60	10	-220	23	0
	27.0	16/43	720	E	60	90	25	5	90	60	11	-220	24	1
	28.0	17/44	720	E	60	90	25	5	90	60	12	-220	25	1
V-Set 3	24.0	8/42	720	E	50	80	25	5	80	60	11	-220	27	-3
	27.0	9/43	720	E	50	80	25	5	80	60	12	-220	27	-1
	28.0	9/43	720	E	50	80	25	5	80	60	12	-220	28	0
	30.0	10/45	720	F	50	80	25	5	80	60	13	-220	29	0
	32.0	11/45	900	F	50	80	25	5	80	60	13	-220	29	1
	33.0	11/45	900	F	50	80	25	5	80	60	13	-220	29	1
	36.0	11/46	900	G	50	80	25	5	80	60	14	-220	30	4

